





HUMBUCKER

(Standard Humbucker Sound
Pickup internally in series)

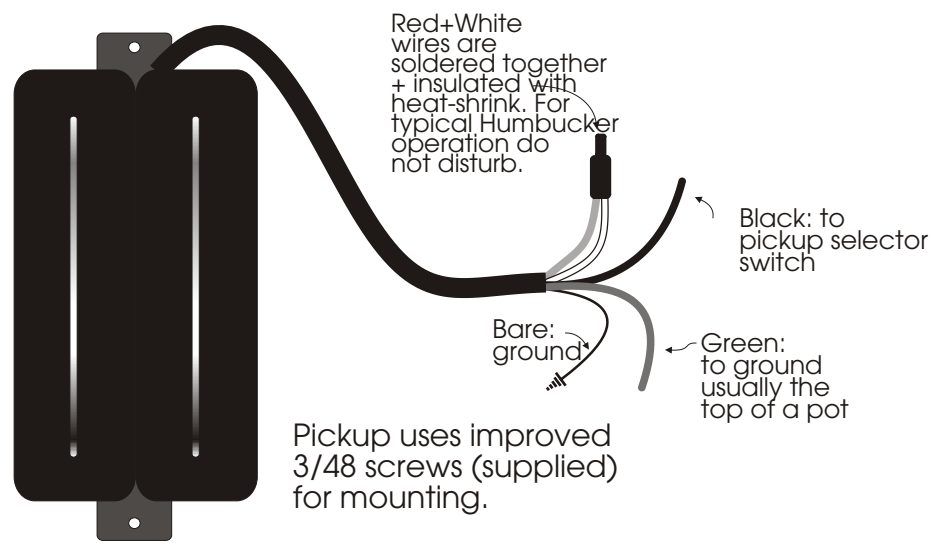

Optional: Parallel Switching.

Allows you to independently run each coil to output (parallel) for an acoustic-like tone and switch back and forth between series (normal humbucker) and parallel tones. Use a DPDT push/pull pot or mini toggle switch.)

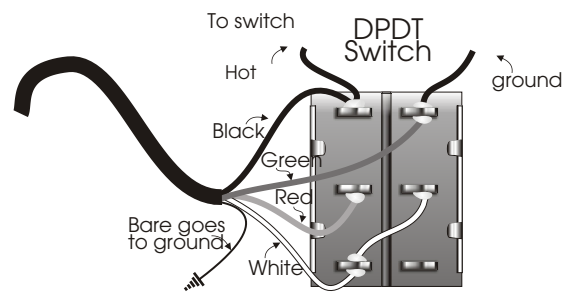

Pickup Height Adjustment



Height between string and pickup blades should be at 4 to 5/32" on the bass side and 2 to 3/32" on the treble side while string is fretted at higher frets.